


Specifications

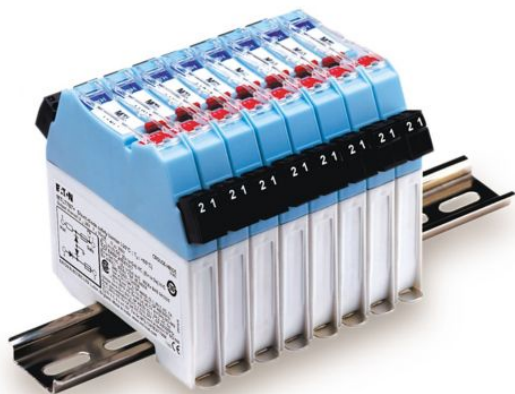

Eaton MTL7707P+

Eaton Crouse-Hinds series MTL7700 Zener barrier, 10-35 Vdc, Up to 35mA, 2 channels, Polycarb, DIN rail, Up to 50mA, supply >28V or low load resistance, Built-in overvoltage protection, For switch inputs and outputs, 2W transmitters (IIB gases)

General specifications

PRODUCT NAME	Eaton Crouse-Hinds series MTL7700 Zener barrier
PRODUCT NAME	Eaton Crouse-Hinds series MTL7700 Zener barrier
CATALOG NUMBER	MTL7707P+
EAN	3066227675750
PRODUCT LENGTH/DEPTH	105 mm
PRODUCT HEIGHT	90 mm
PRODUCT WIDTH	12.6 mm
PRODUCT WEIGHT	140 g

Certifications and compliances

AREA CLASSIFICATION	Hazardous/Classified Locations
STANDARDS TYPE	IEC NEC/CEC IECEX/ATEX
NEC HAZARDOUS RATING	Class I, Zone 2 Class I, Division 2
IECEX/ATEX HAZARDOUS RATING	Zone 0 Zone 2
INGRESS PROTECTION (IP) RATINGS	IP20

Product specifications

NUMBER OF CHANNEL	2
RATED SUPPLY VOLTAGE DC	10-35 Vdc
TYPE OF POWER SUPPLY	DC
SWITCHING CURRENT	Up to 35mA
LOAD	Limited to 50mA, supply >28V or low load resistance
MATERIAL	Polycarbonate
MOUNTING METHOD	DIN rail
MINIMUM OPERATING TEMPERATURE	-20 °C
MAXIMUM OPERATING TEMPERATURE	60 °C
SPECIAL FEATURES	Built-in overvolt protection
USED WITH	For switch inputs and switched outputs, 2W transmitters (IIB gases)

Resources

CATALOGUES	MTL7700 Active / Electronically Protected Barriers
INSTALLATION INSTRUCTIONS	MTL7700 Range Instruction Manual MTL7700 ATEX Safety Instructions

PROJECT NAME:

PROJECT NUMBER:

PREPARED BY:

DATE:



Eaton Corporation plc Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2026 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

