

# MTL4541B REPEATER POWER SUPPLY

4/20mA, HART®, for 2- or 3-wire transmitters

The MTL4541B provides a fully-floating dc supply for energising a conventional 2- or 3-wire 4/20mA transmitter which is located in a hazardous area, and repeats the current in another circuit to drive a safe-area load. For HART 2-wire transmitters, the unit allows bi-directional communications signals superimposed on the 4/20mA loop current.

## SPECIFICATION

See also common specification

### Number of channels

One

### Location of transmitter

Zone 0, IIC, T4–6 hazardous area if suitably certified  
Div. 1, Group A hazardous location

### Safe-area output

Signal range: 4 to 20mA  
Under/over-range: 0 to 24mA  
Safe-area load resistance: 0 to 360Ω @ 24mA  
0 to 450Ω @ 20mA

Safe-area circuit output resistance: > 1MΩ

### Safe-area circuit ripple

<50μA peak-to-peak

### Hazardous-area input

Signal range: 0 to 24mA (including over-range)  
Transmitter voltage: 16.5V at 20mA

### Transfer accuracy at 20°C

Better than 15μA

### Temperature drift

< 0.8μA/°C


### Response time

Settles to within 10% of final value within 50μs

### Communications supported

HART (terminals 1 & 2 only)

## MTL4541B

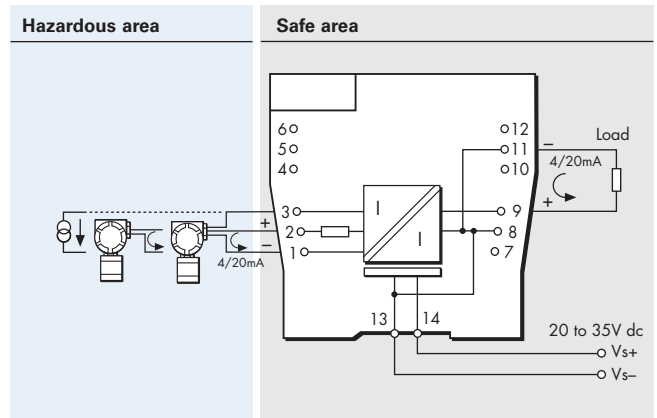

Note: Safe area output referenced to PSU –ve

### LED indicator

Green: power indication

### Maximum current consumption (with 20mA signal)

51mA at 24V

### Power dissipation within unit (with 20mA signal)

0.7W at 24V

### Safety description

#### Terminals 2 to 1 and 3:

$V_O=28V$   $I_O=93mA$   $P_O=651mW$   $U_m = 253V$  rms or dc

#### Terminals 1 to 3:

Simple apparatus  $\leq 1.5V$ ,  $\leq 0.1A$  and  $\leq 25mW$ ; can be connected without further certification into any IS loop with an open-circuit voltage  $< 28V$

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.