


Specifications

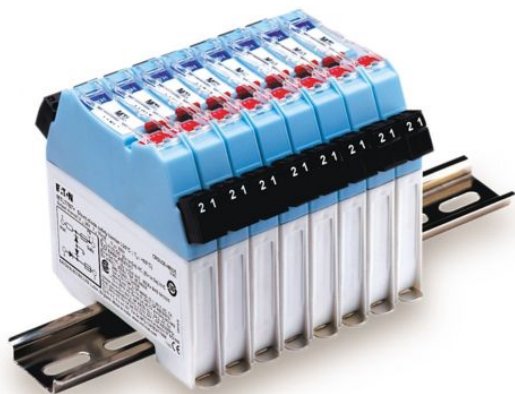

Eaton MTL7706+

Eaton Crouse-Hinds series MTL7700 Zener barrier, 20-35 Vdc, 4-20mA, 1 channel, Polycarbonate, DIN rail mount, 0-500Ω load resistance, Built-in overvolt protection, 2-wire, For 'smart' 2-wire 4/20mA transmitters, + polarity

General specifications

PRODUCT NAME**CATALOG NUMBER**

MTL7706+

EAN

3066227675752

PRODUCT LENGTH/DEPTH

105 mm

PRODUCT HEIGHT

90 mm

PRODUCT WIDTH

12.6 mm

PRODUCT WEIGHT

140 g



Powering Business Worldwide

Product specifications

USED WITH	For 'smart' 2-wire 4/20mA transmitters
SPECIAL FEATURES	Built-in overvolt protection
TYPE	2-wire
AREA CLASSIFICATION	Hazardous/Classified Locations
STANDARDS TYPE	NEC/CEC IECEX/ATEX IEC
NEC HAZARDOUS RATING	Class I, Division 2 Class I, Zone 2
IECEX/ATEX HAZARDOUS RATING	Zone 0 Zone 2
INGRESS PROTECTION (IP) RATINGS	IP20
MATERIAL	Polycarbonate
NUMBER OF CHANNEL	1
TYPE OF POWER SUPPLY	DC
RATED SUPPLY VOLTAGE DC	20-35 Vdc
SWITCHING CURRENT	4-20mA
LOAD	0-500Ω load resistance
MINIMUM OPERATING TEMPERATURE	-20 °C
MAXIMUM OPERATING TEMPERATURE	60 °C
MOUNTING METHOD	DIN rail

Resources

PROJECT NAME:

PROJECT NUMBER:

PREPARED BY:

DATE:



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

Follow us on social media to get the latest product and support information.



© 2025 Eaton. All Rights Reserved.